

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 201 213 A2**

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
02.05.2002 Bulletin 2002/18

(51) Int Cl.7: **A61F 13/512**

(21) Application number: 01309210.1

(22) Date of filing: 31.10.2001

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

- Yoshida, Masaki, c/o Technical Center  
Mitoyo-gun, Kagawa-ken 769-1602 (JP)
- Ishikawa, Hideyuki, c/o Technical Center  
Mitoyo-gun, Kagawa-ken 769-1602 (JP)
- Suzuki, Miou, c/o Technical Center  
Mitoyo-gun, Kagawa-ken 769-1602 (JP)

(30) Priority: 31.10.2000 JP 2000333443

(71) Applicant: **UNI-CHARM CORPORATION**  
Kawanoe-shi Ehime-ken (JP)

(74) Representative: **Parry, Christopher Stephen**  
Saunders & Dolleymore,  
9 Rickmansworth Road  
Watford, Herts. WD18 0JU (GB)


(72) Inventors:  
• Takai, Hisashi, c/o Technical Center  
Mitoyo-gun, Kagawa-ken 769-1602 (JP)

(54) **Topsheet made of nonwoven fabric used in disposable wearing article**

(57) A topsheet 2 for a disposable wearing article is formed with a plurality of fine openings 12 each having an area of about 0.16 - 5 mm<sup>2</sup> and a part of the peripheral edge of each opening is protuberated upward from

upper surface of the topsheet. The topsheet is thereby improved so that body fluids can be rapidly absorbed and stiffness as well as eruption of the wearer's skin can be reliably avoided.

**FIG.1**

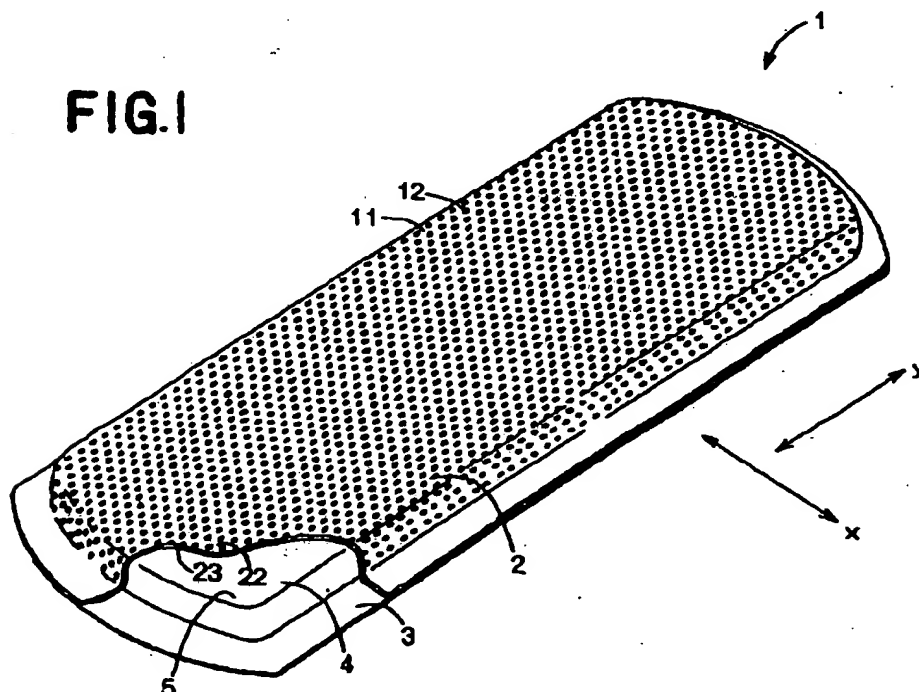

**EP 1 201 213 A2**

## Description

[0001] This invention relates to a topsheet made of nonwoven fabric having a plurality of fine openings suitable for use as a breathable topsheet material or a breathable and liquid-pervious topsheet material in a disposable wearing article such as a disposable diaper, a disposable sanitary napkin, a disposable incontinent pants or a disposable gown used in medical facilities.

[0002] Japanese Patent Application Publication No. 1986-176346A describes a topsheet made of a nonwoven fabric adapted to be used in an absorbent article. This topsheet is formed by thermally fusible hydrophobic fibers having a fiber diameter smaller than  $10\ \mu$  and a basis weight of  $10\ \text{g/m}^2$ . The topsheet has an opening ratio of 10 - 50 % and the minimum opening diameter of 0.3 - 2 mm wherein the fibers are in a melted state around the openings.

[0003] Japanese Patent Application Publication No. 1988-243360A describes a nonwoven fabric having a plurality of fine openings arranged in a given pattern. This nonwoven fabric has a nonwoven fabric region with of circular or elliptic openings a wherein the nonwoven fabric region has a substantially uniform density of fiber and a substantially smooth surface. The nonwoven fabric with the above-described openings is made by applying high pressure water-jets in columnar streams to a fibrous web supported on a cylinder having a plurality of projections in semispherical shape.

[0004] The nonwoven fabric disclosed in each of the above-identified Publication is intended to be used as a liquid-pervious topsheet in disposable wearing article such as a disposable diaper or a sanitary napkin. The openings formed in the nonwoven fabric are a means to enhance transfer and absorption of body fluids into a liquid-absorbent core covered with this nonwoven fabric. However, when a the wearing article using such nonwoven fabric is worn, the nonwoven fabric having a smooth surface and the wearer's skin may come in close contact with each other so that most of the openings may be closely covered with the wearer's skin and thereby rapid absorption of body fluids may be obstructed. In addition, such close contact of the nonwoven fabric with the wearer's skin may often cause stuffiness and eruption of the wearer's skin.

[0005] It is an object of this invention to solve such a problem as possibly occurring in a nonwoven fabric made by the prior art when this nonwoven fabric is used as a topsheet of a disposable wearing article.

[0006] There is provided a, according to this invention, a topsheet made of a nonwoven fabric for a disposable wearing article having upper and lower surfaces and formed with a plurality of openings extending through the upper and lower surfaces.

[0007] The topsheet has a substantially uniform thickness and each of the openings has an area of about  $0.16 - 5\ \text{mm}^2$  wherein only a part of the periphery of the opening is increased in thickness compared to the uni-

form thickness of the topsheet so as to make the openings protuberant upward from the upper surface.

Fig. 1 is a perspective view showing a partially cut-away sanitary napkin;

Fig. 2 is a fragmentary enlarged view of a topsheet; Fig. 3 is a sectional view taken along a line III - III in Fig. 2;

Fig. 4 is a view similar to that in Fig. 2, showing another embodiment of the invention.

Fig 5 is a sectional view taken along a line V - V in Fig. 4;

Fig. 6 is a sectional view taken along a line VI - VI in Fig. 5;

Fig. 7 is a view similar to that in Fig. 5, showing still another embodiment of the invention; and

Fig. 8 is a sectional view taken along a line VIII - VIII in Fig. 7.

[0008] Details of a topsheet made of a nonwoven fabric according to this invention will be more fully understood from the description of a sanitary napkin as a one embodiment of this invention given hereunder with reference to the accompanying drawings.

[0009] Fig. 1 is a perspective view showing a partially cutaway sanitary napkin 1 using a topsheet 2 according to this invention. The napkin 1 comprises the liquid-pervious topsheet 2, a liquid-impervious backsheet 3 and a liquid-absorbent core 4 disposed between these two sheets 2, 3 wherein the top- and backsheet 2, 3 extend outward beyond a peripheral edge of the core 4, overlaid to each other and bonded together water-tight in these respective extensions. The napkin 1 is defined by a longitudinal direction y and a transverse direction x, both orthogonal to the direction of its thickness and configured to be larger in the longitudinal direction y.

[0010] Fig. 2 is a fragmentary enlarged view of a the topsheet 2. The topsheet 2 made of a nonwoven fabric has an upper surface 22 intended to come in contact with the skin of the wearer, a lower surface 23 underlying the core 4, a fibrous zone 11 formed by a plurality of fibers 6 and a plurality of opening zones 12 surrounded by the fibrous zone 11 and extending between the upper and lower surfaces 22, 23 (See Fig. 1 also). The fibrous zone 11 has a basis weight of about  $10 - 100\ \text{g/m}^2$  and preferably comprises hydrophobic fibers by about 80 - 100 % by weight and hydrophilic fibers by about 20 - 0 % by weight wherein the hydrophobic fiber is a thermoplastic synthetic fiber having a fineness of about 0.1 - 10 dtex. Each of the opening zones 12 has an opening area of about  $0.16 - 5\ \text{mm}^2$  and the total area of the opening zones 12 entirely occupies about 2 - 60 % of a surface area of the topsheet 2. While the plane shapes as well as the layout of the opening zones 12 on the topsheet 2 are not specified, these opening zones 12 are illustrated to be shaped in elliptic which are larger in the longitudinal direction y and arranged substantially at regular intervals in the longitudinal direction as well as

in the transverse direction x.

[0011] Fig. 3 is a sectional view taken along a line III - III in Fig. 2. While the fibrous zone 11 of the topsheet 2 has a substantially uniform thickness p as a whole, a portion of a peripheral edge defining each of the opening zones 12 extending adjacent its lower end 13 (as viewed in Fig. 2) has a thickness q larger than the thickness p so as to form a protuberance 14 gradually rising above the upper surface of the topsheet 2. The protuberance 14 gradually decreases in thickness along the peripheral edge of the opening zones 12 and along the direction y as viewed in Fig. 2. A range in which the protuberance 14 and its skirt extends along the peripheral edge of the opening zones 12 is preferably equal to about 1/4 - 1/2 of the entire circumference of the opening zones 12. In such topsheet 2, depending on a particular application thereof, its flat region preferably has a thickness p of about 0.01 - 5 mm and an apparent density of about 0.01 - 1.5 g/cm<sup>3</sup>. Preferably, the protuberance 14 has a thickness q which is larger than the thickness p by about 0.1 - 2 mm and an apparent density than the density of the flat region by about 1.0 - 5 times.

[0012] When the sanitary napkin 1 using such a topsheet 2 is worn, the topsheet 2 comes in contact with the wearer's skin at crests of each of the protuberances 14 but the opening zones 12 adjacent to the respective protuberance 14 and the plains contiguous to the respective protuberance 14 tend to form a clearance between the topsheet 2 and the wearer's skin and thereby to prevent the opening zones 12 from being closed by the wearer's skin. In this way, menstrual discharge can smoothly flow into the respective opening zones 12 and is rapidly transferred to the core 4. The clearance between the topsheet 2 and the wearer's skin serves to improve ventilation between the topsheet 2 and the wearer's skin. With such sanitary napkin 1, leakage of menstrual discharge as well as stuffiness or eruption can be effectively avoided. The protuberance 14 formed along the peripheral edges of the respective opening zones 12 are particularly effective to prevent the opening zones 12 from being closed by the wearer's skin. The protuberance 14 is formed on the part of the opening zone's peripheral edge which lies aside in the longitudinal direction y toward its lower end 13 as viewed in Fig. 2, so air which would otherwise stay between the topsheet 2 and the wearer's skin can rapidly flow in the longitudinal direction y as well as in the transverse direction x between each pair of the adjacent protuberance 14, 14. It is possible to form the protuberance 14 so as to be put aside in the longitudinal direction y toward the upper end or in the transverse direction x toward one of the side edges of the opening zone's peripheral edge as viewed in Fig. 2. The protuberance 14 is formed to have a density higher than that in the region extending therearound and it is not apprehended that the shape of the protuberance might be easily deformed when the protuberance is pressed against the wearer's skin. The napkin 1 gives somewhat dry touch to its wear-

er even after absorption of menstrual discharge since the fibrous zone 11 of the topsheet 2 is basically formed by 11 hydrophobic thermoplastic synthetic fiber. It should be understood that the fibrous zone 11 of the topsheet 2 may be treated in desired regions such as the lower surface 23 and/or the peripheral edges of the respective opening zones 12 with an appropriate agent to make these regions hydrophilic.

[0013] Fig. 4 is a view similar to Fig. 2 but showing another embodiment of the invention, Fig. 2 is a sectional view taken along a line V - V in Fig. 4 and Fig. 6 is a sectional view taken along a line VI - VI in Fig. 5. The topsheet 2 according to this embodiment comprises a nonwoven fabric layer 21 having upper and lower surfaces 22, 23 and a thermoplastic synthetic resin film layer 24 bonded to the upper surface 22. The nonwoven fabric layer 21 is similar to the topsheet 2 illustrated by Fig. 2 in that the layer 21 has the fibrous zone 11 and the opening zones 12. The film layer 24 comprises a plurality of ribbon-like strips 26 spaced from and extending in parallel to one another in one direction, for example, in the longitudinal direction y. These ribbon-like strips 26 are welded or bonded by adhesion to the nonwoven fabric layer 21 and interrupted in the longitudinal direction by the respective opening zones 12, so the ribbon-like strips 26 do not cover the opening zones 12. The ribbon-like strips 26 bonded to the nonwoven fabric, particularly to the fibers 6 forming the peripheral walls 27 of the opening zones 12 and the protuberance 14 serve to protect these opening zones 12 and protuberance 14 from getting out of shape during use of the napkin 1. Each pair of the adjacent ribbon-like strips 26 are preferably connected to each other by bridges 32 extending in the transverse direction x so that a relative movement of these ribbon-like strips 26 can be restrained and a distance between them can be reliably maintained. The translucent or opaque ribbon-like strips 26 may be used to conceal the core 4 which was sated with menstrual discharge absorbed therein.

[0014] Fig. 7 is a view similar to Fig. 5 but showing still another embodiment of the invention and Fig. 8 is a sectional view taken along a line VIII - VIII in Fig. 7. In the topsheet 2 according to this embodiment, the film forming the ribbon-like strips 26 is fibrillated along the side edges 28 of the respective ribbon-like strips 26 to form a plurality of fine naps 33 rising toward the direction above the upper surface 22 of the nonwoven fabric layer 21. Such ribbon-like strips 26 offer velvet-like touch. The ribbon-like strips 26 having the naps 33 on the side edges thereof are similar to those described in Japanese Patent Application Publication No. 2000-225144A and preferably have a thickness of about 0.001 - 0.05 mm, a width of about 0.03 - 3 mm and spaced about 0.1 - 5 mm apart each other. The naps 33 have a height of with 0.02 - 5 mm and are formed in the longitudinal direction y with a density of about 10 - 100 naps/cm.

[0015] While this invention has been described above with respect to the sanitary napkin 1, the topsheet 2 ac-

according to this invention is suitable also as the topsheet for other articles such as a disposable diaper, disposable training pants, disposable incontinent pants and a disposable gown used in medical facilities which particularly require breathable topsheets or breathable liquid-pervious topsheets. The nonwoven fabric forming such topsheet 2 may be formed by bonding or mechanically entangling the fibers 6 together. In the napkin 1 illustrated as the one embodiment of this invention, the backsheet 3 comprises the thermoplastic synthetic resin film and the core 4 comprises fluff pulp or a mixture of fluff pulp and high water absorption polymer grains covered with tissue paper 5 (See Fig. 1). For implementation of this invention, a thickness of the nonwoven fabric was measured under a load of 3 g.

[0016] The topsheet according to this invention has a plurality of the protuberances each formed on a part of the opening zone's peripheral edge, so it is not apprehended that the opening zones might be closed by the wearer's skin even when these opening zones come in contact with the wearer's skin. In this way, the liquid-permeability of the opening zones as well as the breathability in the vicinity of these opening zones are reliably ensured.

#### Claims

1. A topsheet made of a nonwoven fabric for a disposable wearing article having upper and lower surfaces and formed with a plurality of openings extending through said upper and lower surfaces, said topsheet includes:

said nonwoven fabric having a substantially uniform thickness and each of said openings having an area of about 0.16 - 5 mm<sup>2</sup> wherein only a part of the periphery of said opening is increased in thickness compared to said uniform thickness so as to make said openings protuberated upward from said upper surface.

2. The topsheet according to Claim 1, wherein said nonwoven fabric has a longitudinal direction and a transverse direction both orthogonal to a thickness direction of said nonwoven fabric and said part of the periphery of said opening protuberating upward is formed aside in one of said two directions.

3. The topsheet according to Claim 1, wherein part of the periphery of said opening is increased in thickness upward from said upper surface by about 0.1 - 2 mm compared to said uniform thickness of said nonwoven fabric.

4. The topsheet according to Claim 1, wherein said part of the periphery of said opening protuberating upward has an apparent density higher than that of

said nonwoven fabric extending around said part of the periphery.

5. The topsheet according to Claim 1, wherein a total area of said openings occupies 2 - 60 % of a surface area of said nonwoven fabric.
6. The topsheet according to Claim 1, wherein said nonwoven fabric is made of thermoplastic synthetic fiber.
7. The topsheet according to Claim 1, wherein said upper surface of said nonwoven fabric is covered with a plurality of ribbon-like thermoplastic synthetic resin film strips spaced in parallel to one another and extending in one of said longitudinal direction and said transverse direction.


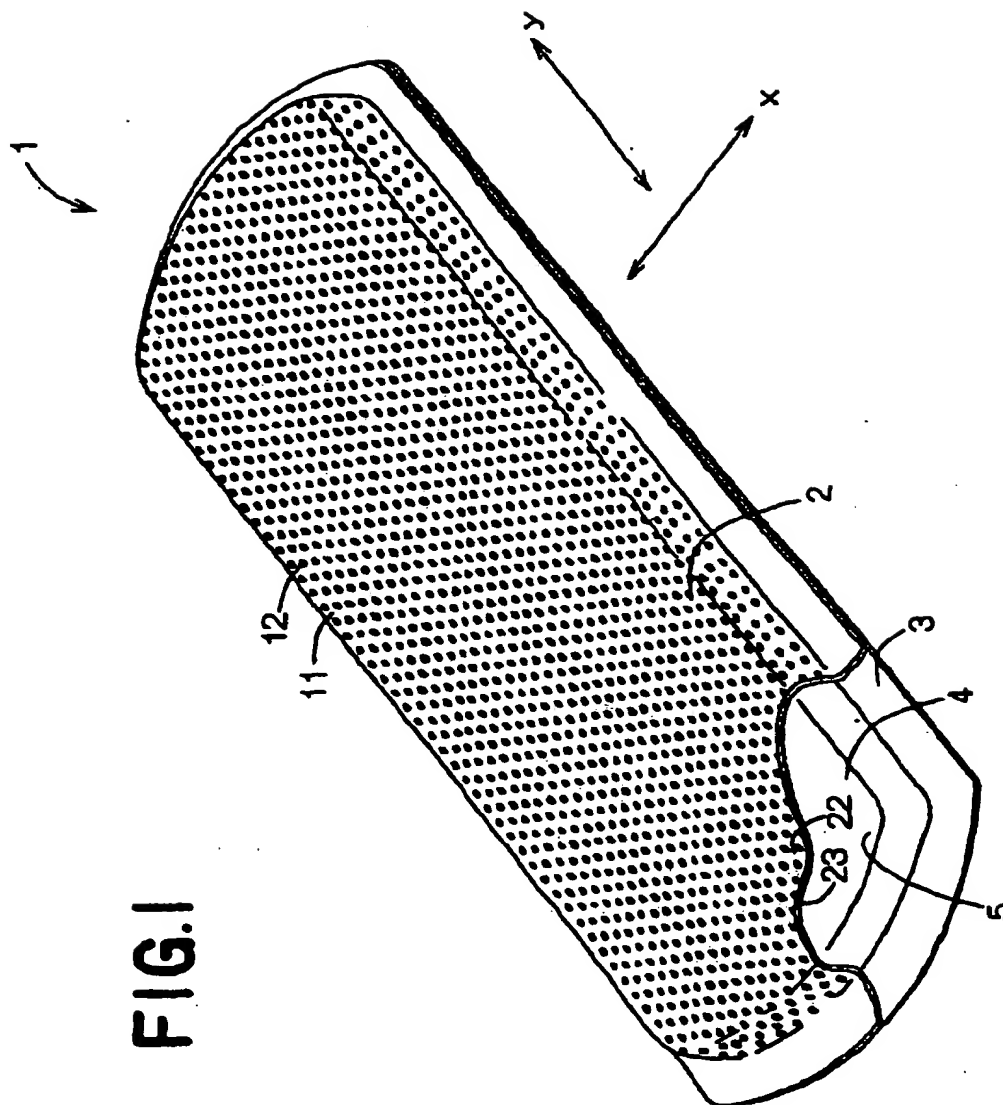


FIG. 1

FIG.2

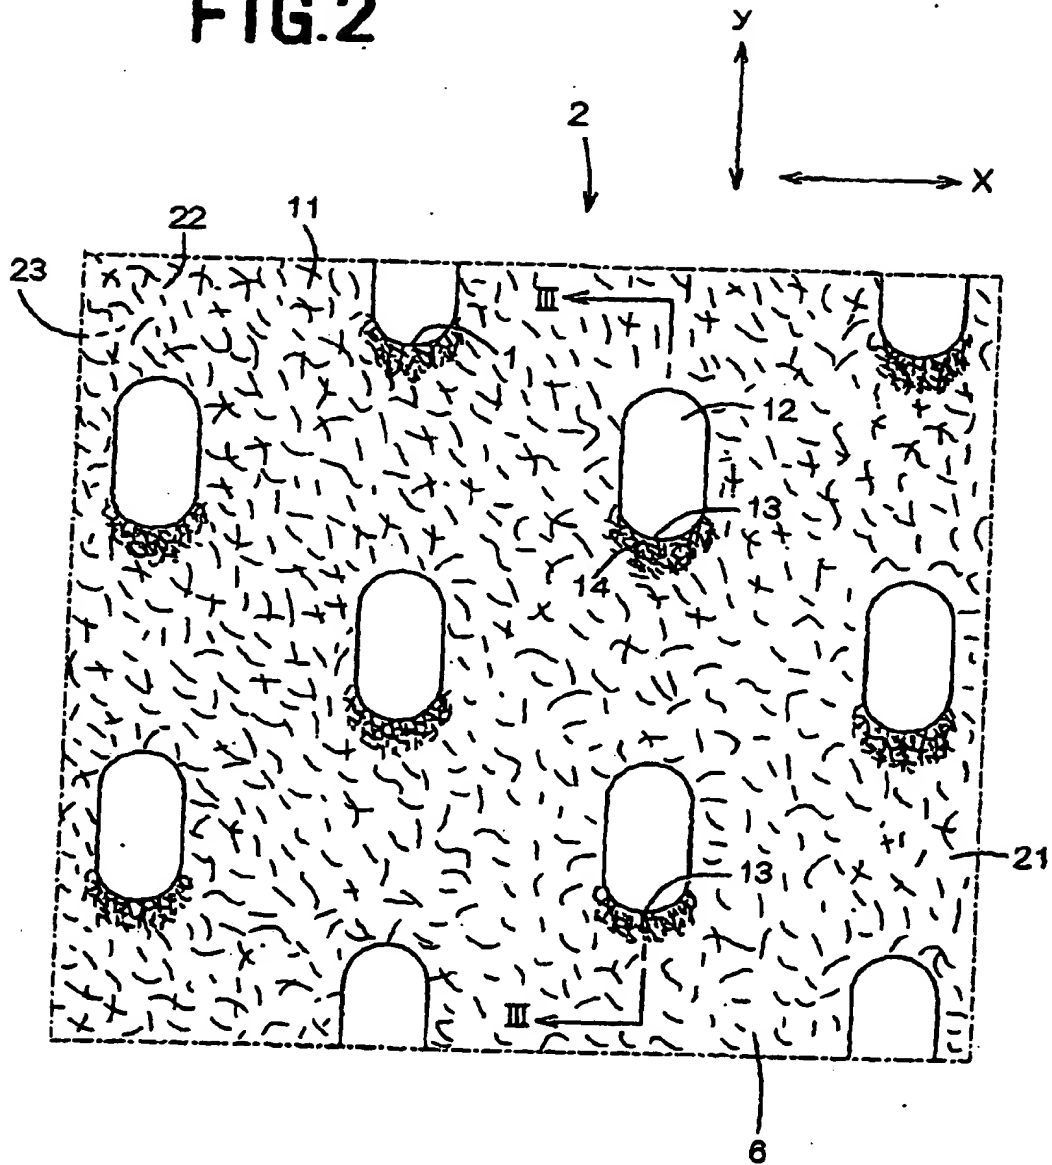

351

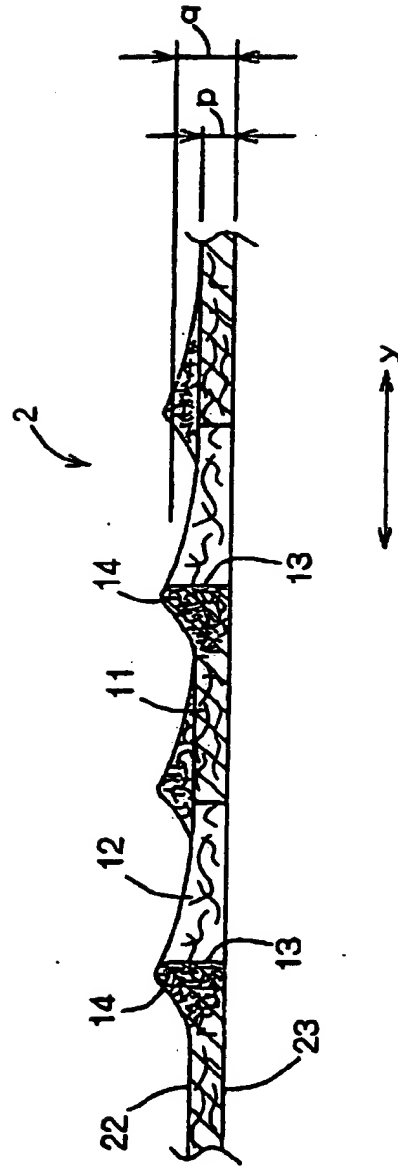




FIG. 4

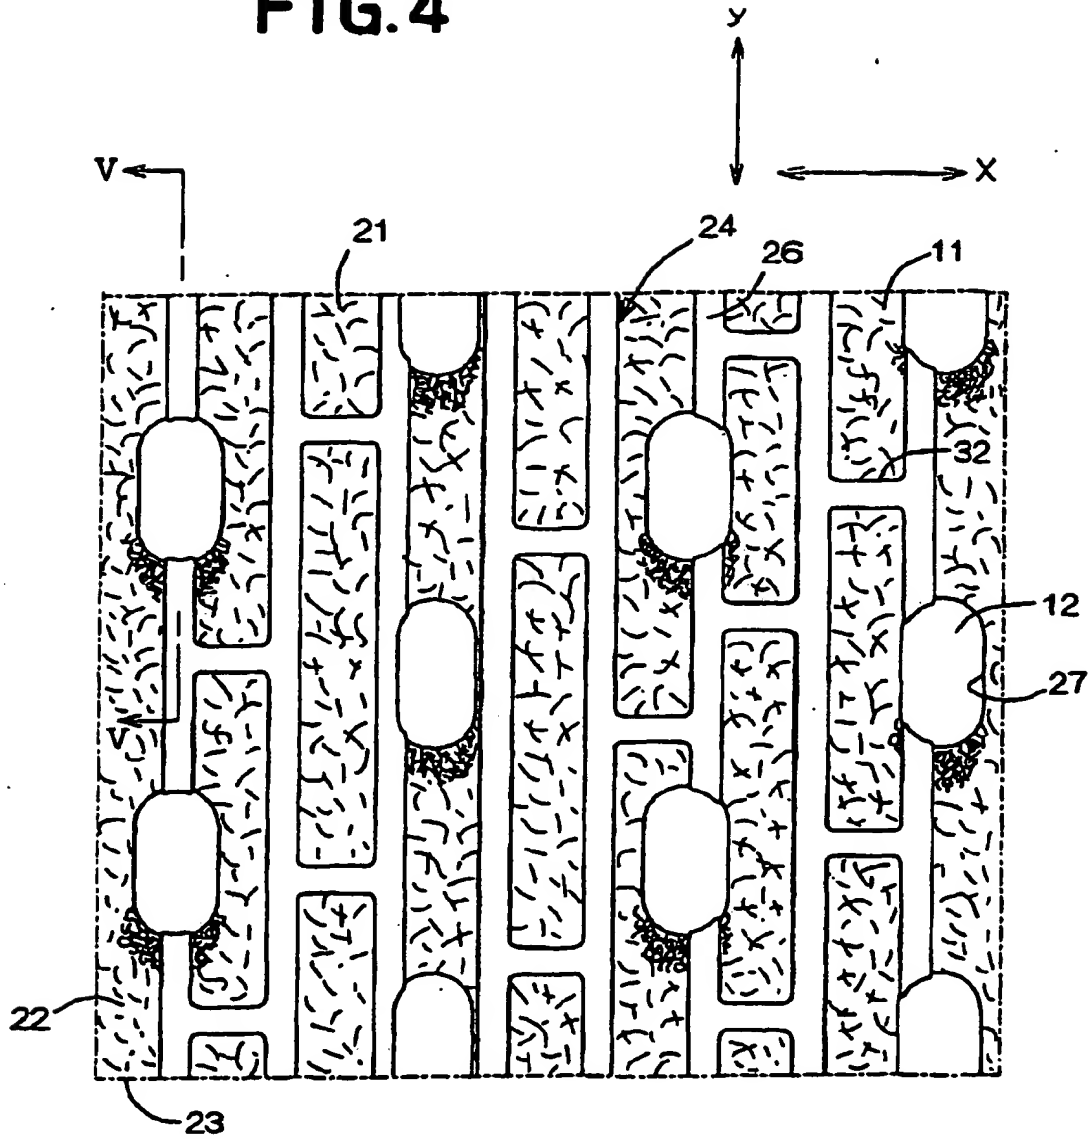


FIG.5

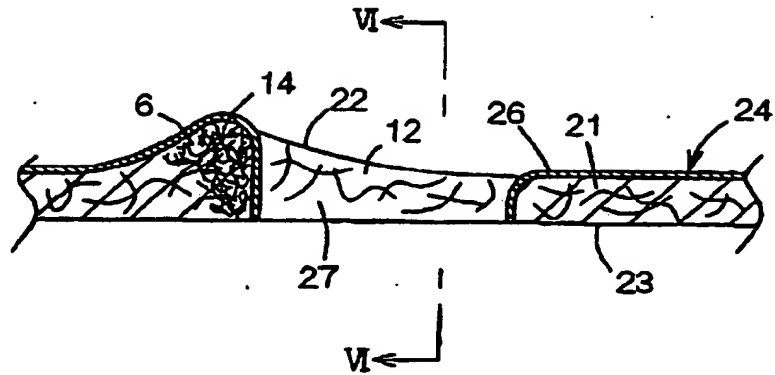


FIG.6

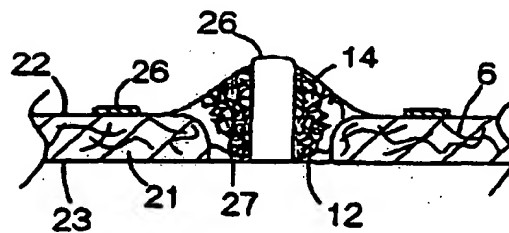


FIG.7


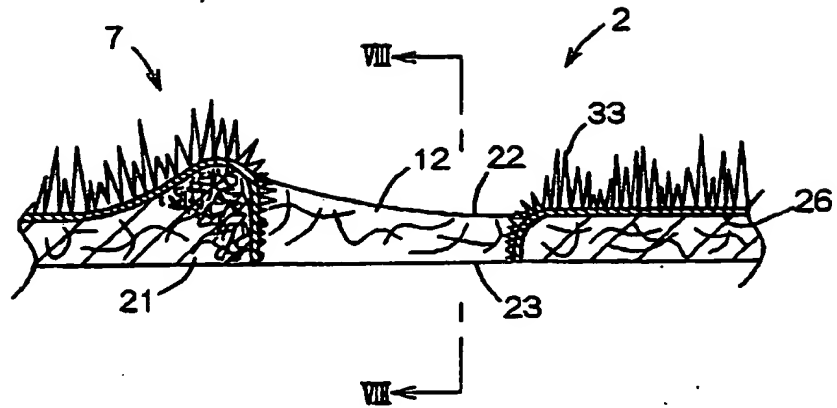


FIG.8



(19)

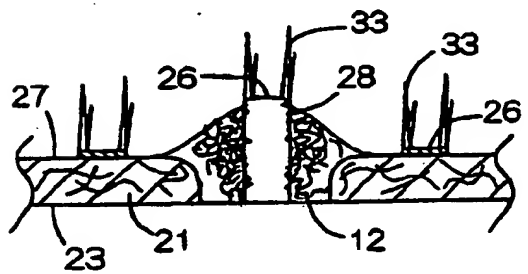

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 201 213 A3**

(12)

**EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
08.05.2002 Bulletin 2002/19

(51) Int Cl.7: **A61F 13/512**

(43) Date of publication A2:  
02.05.2002 Bulletin 2002/18

(21) Application number: 01309210.1

(22) Date of filing: 31.10.2001

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

- Yoshida, Masaki, c/o Technical Center  
Mitoyo-gun, Kagawa-ken 769-1602 (JP)
- Ishikawa, Hideyuki, c/o Technical Center  
Mitoyo-gun, Kagawa-ken 769-1602 (JP)
- Suzuki, Miou, c/o Technical Center  
Mitoyo-gun, Kagawa-ken 769-1602 (JP)

(30) Priority: 31.10.2000 JP 2000333443

(71) Applicant: **UNI-CHARM CORPORATION**  
Kawanoe-shi Ehime-ken (JP)

(74) Representative: **Parry, Christopher Stephen**  
Saunders & Dolleymore,  
9 Rickmansworth Road  
Watford, Herts. WD18 0JU (GB)


(72) Inventors:  
• Takai, Hisashi, c/o Technical Center  
Mitoyo-gun, Kagawa-ken 769-1602 (JP)

(54) **Topsheet made of nonwoven fabric used in disposable wearing article**

(57) A topsheet 2 for a disposable wearing article is formed with a plurality of fine openings 12 each having an area of about 0.16 - 5 mm<sup>2</sup> and a part of the peripheral edge of each opening is protuberated upward from

upper surface of the topsheet. The topsheet is thereby improved so that body fluids can be rapidly absorbed and stuffiness as well as eruption of the wearer's skin can be reliably avoided.

**FIG.1**

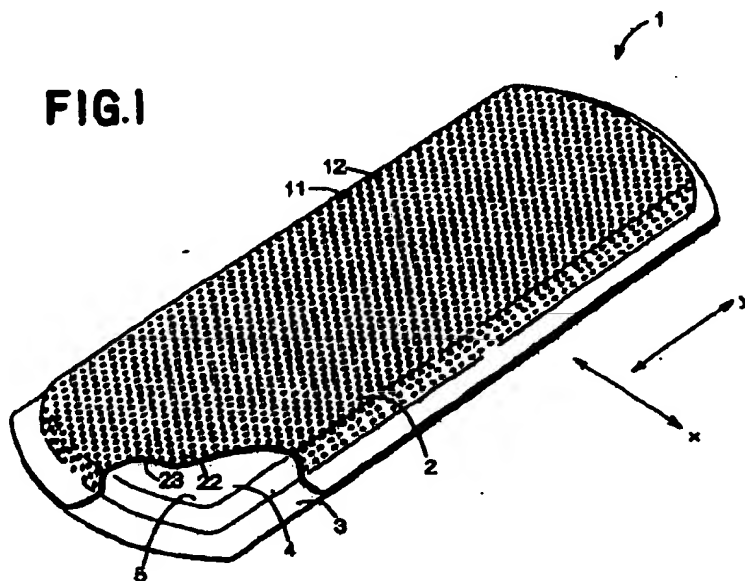

**EP 1 201 213 A3**



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 01 30 9210

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
P,X	EP 1 121 916 A (UNI CHARM CORP) 8 August 2001 (2001-08-08) * the whole document *	1-6	A61F13/512
A	US 5 824 352 A (YANG CHING-YUN MORRIS ET AL) 20 October 1998 (1998-10-20) * abstract; figures *	1-7	
A	EP 1 025 826 A (UNI CHARM CORP) 9 August 2000 (2000-08-09) * abstract * * column 7, line 33-56; figure 4 *	1,5,7	
A	WO 94 20054 A (MOELNLYCKE AB ;BILLGREN TOMAS (SE)) 15 September 1994 (1994-09-15) * page 1, line 3 - page 3, line 14; figures 1,2 *	1	
A	US 6 048 600 A (HANSSON ROY) 11 April 2000 (2000-04-11) * abstract; figure 1 *	1	
A	US 4 741 941 A (ENGLEBERT STEPHEN M ET AL) 3 May 1988 (1988-05-03) * column 8, line 50 - column 9, line 18; figures 9-12 *	1	TECHNICAL FIELDS SEARCHED (Int.Cl.7) A61F
A	EP 0 995 414 A (PANTEX SRL) 26 April 2000 (2000-04-26) * claims; figures *	1-7	
A	US 5 897 543 A (FRANCIS MICHAEL A) 27 April 1999 (1999-04-27) * abstract; figures *	1	
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>14 March 2002</b>	Examiner <b>Seabra, L</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if taken alone with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons A : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (03.02) (P4/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 9210

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

14-03-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1121916	A	08-08-2001	JP 2001212897 A	07-08-2001
			AU 1677601 A	09-08-2001
			BR 0100320 A	04-09-2001
			CN 1310991 A	05-09-2001
			EP 1121916 A2	08-08-2001
			US 2001014796 A1	16-08-2001
US 5824352	A	20-10-1998	AT 182777 T	15-08-1999
			AU 711000 B2	07-10-1999
			AU 3057995 A	28-03-1996
			BR 9504038 A	24-09-1996
			CA 2157729 A1	17-03-1996
			CN 1130053 A	04-09-1996
			CZ 9502380 A3	17-04-1996
			DE 69511192 D1	09-09-1999
			DE 69511192 T2	24-02-2000
			EP 0701805 A1	20-03-1996
			ES 2134981 T3	16-10-1999
			FI 954358 A	17-03-1996
			GR 3031431 T3	31-01-2000
			HK 1010326 A1	20-04-2000
			HU 76306 A2	28-08-1997
			JP 8187813 A	23-07-1996
			NO 953655 A	18-03-1996
			NZ 272887 A	26-06-1998
			RU 2150387 C1	10-06-2000
			SG 54974 A1	21-12-1998
EP 1025826	A	09-08-2000	JP 2000225144 A	15-08-2000
			AU 1494500 A	10-08-2000
			BR 0000618 A	16-01-2001
			CN 1262170 A	09-08-2000
			EP 1025826 A2	09-08-2000
WO 9420054	A	15-09-1994	SE 502661 C2	04-12-1995
			DE 69421801 D1	30-12-1999
			EP 0687169 A1	20-12-1995
			JP 8507451 T	13-08-1996
			SE 9300683 A	02-09-1994
			WO 9420054 A1	15-09-1994
US 6048600	A	11-04-2000	SE 507050 C2	23-03-1998
			DE 19717876 A1	06-11-1997
			GB 2312625 A ,B	05-11-1997

EPO FORM P0458

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 9210

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

14-03-2002

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 6048600	A		SE	9601660 A	31-10-1997
			US	5976665 A	02-11-1999
US 4741941	A	03-05-1988	AU	584470 B2	25-05-1989
			AU	6464586 A	07-05-1987
			CA	1314388 A1	16-03-1993
			GB	2182685 A ,B	20-05-1987
			KR	9310348 B1	16-10-1993
			MX	162781 A	26-06-1991
EP 0995414	A	26-04-2000	EP	0995414 A1	26-04-2000
US 5897543	A	27-04-1999	NONE		

EPO FORM P0159

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82